A1 **GP Epoxy Laminate GP 环氧纤维布压层系统**
Nominal 2mm Thickness 纤维布压层厚度约 2 mm
Suitable to 适用于：Team A12a

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Grinding 研磨	
Primer 底涂	GP 10	Roller 滚涂	0.3 kg/m^2
Laminate layer 玻璃钢压层	GP 10 + Glass Mat 300gx2 + Surface Fleece 30g	Hand and Roller 手工+滚涂	2.2 kg/m^2 + 2.2 m^2/m^2 +1.1 m^2/m^2
1st Top Coat 第 1 道面涂	GP 2000	Roller 滚涂	0.3 kg/m^2
2nd Top Coat 第 2 道面涂	GP 2000	Roller 滚涂	0.3 kg/m^2
Remarks 备注：	- Standard Colours 标准色: Medium or Dark Grey 中灰至深灰色		

A2 **GP 2000 Solvent Free Epoxy Self-Leveling 无溶剂环氧自流平**
Nominal 1.5mm Coating Thickness 约 1.5mm 厚度
Suitable to 适用于：Team-A 12b

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Shot blasting / Grinding 喷砂或研磨	
Primer 底涂	GP 10	Roller 滚涂	0.3 kg/m^2
Body coat 面层	GP 2000 + Quartz	Trowel 镘涂	1.3 kg/m^2 0.6 kg/m^2
Remarks 备注：	- Standard Colours 标准色: Medium to Dark Grey 中灰至深灰色		

A3 **Ashland+ Henkel VE Laminate 雅士兰及汉高乙烯基树脂纤维布压层系统**
Nominal 2 mm Laminate Thickness 纤维布压层厚度约 2 mm
Suitable to 适用于：Team B1 a b；Team B2-35 b; Team D-49 b

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Grinding 研磨	
Primer 底涂	Ashland DM 411	Roller 滚涂	0.3 kg/m^2
Laminate layer 玻璃钢压层	Ashland DM 411 + Glass mat 300g x 2 + Surface Fleece 30g	Hand and Roller 手工+滚涂	2.2 kg/m^2 + 2.2 m^2/m^2 +1.1 m^2/m^2
1st Top Coat 第 1 道面涂	Henkel PC 331	Roller 滚涂	0.3 kg/m^2
2nd Top Coat 第 2 道面涂	Henkel PC 331	Roller 滚涂	0.3 kg/m^2
Remarks 备注：	- Standard Colours 标准色: Medium to Dark Grey 中灰至深灰色		

For areas eg. 21/23/24 a chemical collection pits the laminate layer will be replaced by additional two coats Henkel Penncoat 331 If there is difficulty for access, the price will be the same.

类似 21/23/24 a 区域，如果因狭窄空间等因素无法进入，可以将玻璃钢压层替换成额外两层 Henkel Penncoat 331，价格不变。

A4 **Blink Tile + Henkel Furalac Tiling System with Chemical Resistant Membrane**
Blink 工业耐酸砖+汉高带防腐隔离层的耐高温呋喃树酯胶泥贴砖系统
Nominal 24 mm Thickness 系统厚度约 24 mm
Suitable to 适用于：Team B2-35 a, d, 36 c, 40

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Grinding 研磨	
Primer 底涂	Henkel PT Epoxy Primer	Roller 滚涂	0.3 kg/m^2
Membrane 耐腐蚀防渗膜 Nominal 厚度约 2 mm	Henkel Tufchem II	Trowel 镘涂	1.5 L/m^2
Bedding 背衬胶泥 Nominal 厚度约 3-4 mm	Henkel Furalac Mortar	Trowel 镘涂	6.4 kg/m^2
Tile 地砖	INTERBAU-BLINK 240 x 115 x 18mm	Set 手工安装	34 pcs/m^2
Grouting 勾缝胶泥 Nominal 宽度约 4mm	Henkel Furalac Mortar	Point 勾缝	1.80 kg/m^2
Remarks: 备注：	- Standard Tile Grey White 标准灰白色地砖 - Mortar Black 黑色胶泥		

A5 **Blink Tile+ Henkel Novolac Tiling System with Chemical Resistance Membrane**
Blink 工业耐酸砖及 汉高带防腐隔离层的酚醛胶泥贴砖系统
Nominal 24mm Thickness 系统厚度约 24 mm
Suitable to 适用于：Team B2-35 c,e 36 a,b,d

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Grinding 研磨	
Primer 底涂	Henkel PT Epoxy Primer	Roller 滚涂	0.3 kg/m^2
Membrane 耐腐蚀防潮膜 Nominal 厚度约 2 mm	Henkel Tufchem II	Trowel 镘涂	1.5 L/m^2
Bedding 背衬胶泥 Nominal 厚度约 3-4 mm	Henkel Thinset Mortar	Trowel 镘涂	6.4 kg/m^2
Tile 地砖	INTERBAU-BLINK 240 x 115 x 18mm	Set 手工安装	34 pcs/m^2
Grouting 勾缝胶泥 Nominal 宽度约 4mm	Henkel PC Novolac Mortar	Point 勾缝	1.8 kg/m^2
Remarks: 备注：	- Standard Tile Grey White 标准灰白色地砖 -Mortar in grey 灰色胶泥		


A6 **Blink Tile+ Henkel Novolac Tiling System**
Blink 工业耐酸砖及汉高酚醛胶泥贴砖系统
Nominal 22mm Thickness 系统厚度约 22 mm
Suitable to 适用于：Team Ca,Cb

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Grinding 研磨	
Primer 底涂	Henkel PT Epoxy Primer	Roller 滚涂	0.3 kg/m^2
Bedding 背衬胶泥 Nominal 厚度约 3-4 mm	Henkel Thinset Mortar	Trowel 镘涂	6.4 kg/m^2
Tile 地砖	INTERBAU-BLINK 240 x 115 x 18mm	Set 手工安装	34 pcs/m^2
Grouting 勾缝胶泥 Nominal 宽度约 4mm	Henkel PC Novolac Mortar	Point 勾缝	1.8 kg/m^2
Remarks: 备注：	- Standard Tile Grey White 标准灰白色地砖 -Mortar in grey 灰色胶泥		

A7.1 **Chemical Resistant Movement Joint System for Tiling**
贴砖系统防腐伸缩缝
Henkel Flexjoint Nominal 7mm width Full Depth of Tile
约 7mm 宽与砖同深

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Solvent Cleaning / Sanding 溶剂清洁/打磨	
Movement Joint 伸缩缝	Flexjoint	Caulk 填缝	140 cc/lm
Remarks: 备注：	This is a maintenance item under prolonged chemical attack and wear.这是一个需要每年进行维护保养的抵抗化学腐蚀耐选项。		


Note: This is suitable for the treatment of expansion joints (cold/day/work joints) which pass through the chemical resistant tiling areas.
注：本选项适用于有伸缩缝（变形缝、施工缝）穿过耐化学腐蚀砖的场合。

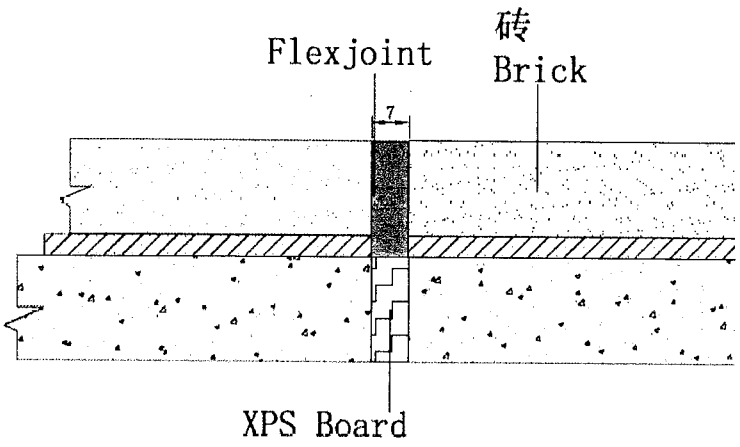

A7.2 **Chemical Resistant Movement Joint System for Tiling**
贴砖系统防腐伸缩缝
Henkel Tufchem II Nominal 20mm width Full Depth of Tile
约 20mm 宽与砖同深

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Solvent Cleaning / Sanding 溶剂清洁/打磨	
FRP Angel 玻璃钢护角	Local FRP Angel		
Movement Joint 伸缩缝	Tufchem II	Caulk 填缝	400 cc/lm
Remarks: 备注：	This is a maintenance item under prolonged chemical attack and wear.这是一个需要每年进行维护保养的抵抗化学腐蚀耐选项。		

Note: This is suitable for the treatment of settlement joints around the columns and equipment foundations which pass through the chemical resistant tiling areas.
注：本选项适用于有柱子、设备沉降缝穿过耐化学腐蚀砖的场合。

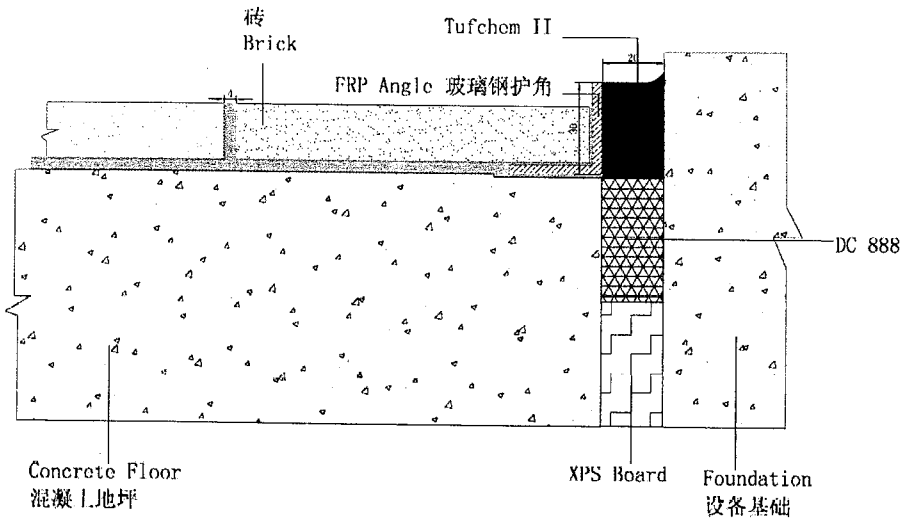

A8 **Blink Tile + Henkel Phenolic Tiling System with Chemical Resistant Membrane**
Blink 工业耐酸砖+汉高带防腐隔离层的耐高温酚类树酯胶泥贴砖系统
Nominal 24 mm Thickness 系统厚度约 24 mm
Suitable to 适用于：Team B2-40

System Components 系统组成	Production Name 产品名称	Application 施工方法	Consumption 涂布率
Surface Preparation 表面处理		Grinding 研磨	
Primer 底涂	Henkel PT Epoxy Primer	Roller 滚涂	0.3 kg/m^2
Membrane 耐腐蚀防渗膜 Nominal 厚度约 2 mm	Henkel Tufchem II	Trowel 镘涂	1.5 L/m^2

| No. | PET | AREA NO. | | Item to be applied (Paving, PC Channel, etc) | (SURFACE) INTERNAL CHEMICAL PROTECTION | | |